




SL7x120TC Wireless Moving Message Displays

Specifications

Viewing Distance:	Up to 100 ft.
Case Dimensions:	4.25"H x 38.7"L x 1.75"D
Display Dimensions:	2.62"H x 37.0"L
Display Weight:	9.7lbs.
Display Array:	120 Columns x 7 Rows
Display Memory:	512 Bytes
Pixel Size:	.3"
Pixel (LED) Color:	8 colors & 3 rainbow effects
Center-to-center Pixel Spacing (pitch):	.3"
Character Size:	2.1"
Character Array:	20 Characters
Memory Retention:	10 years
Message Capacity:	16 emergency messages
Message Operating Modes:	25 consisting of: Auto, Flash, Hold, Interlock, Roll (6 directions), Rotate, Slide, Snow, Sparkle, Spray, Star Burst, Switch, Twinkle, Wipe (6 directions) or Cycle Color. (Roll Left is default for emergency messages)
Receiver:	BRG UHF
Receiver Dimensions:	3.75"W x 2.87"H x 1.25"D
Zoning:	Yes. Determined by receiver
Clock:	Yes. 12 or 24 hour format
Display Power:	110 VAC
Power Consumption:	32 Watts
Maximum Power	
Cord Length:	10 ft.
Case Material:	Extruded Aluminum
Limited Warranty:	One-year parts and labor, factory servicing
Operating Temperature:	32 to 120 F
Humidity Range:	0% to 95% non-condensing
Mounting:	Hardware to accommodate wall mounting

Options

UPS Battery Backup:	Internal to display
UPS Run Time:	30+ minutes continuous
Double Sided Mounts:	Rigid Ceiling Mount or Chain Mount

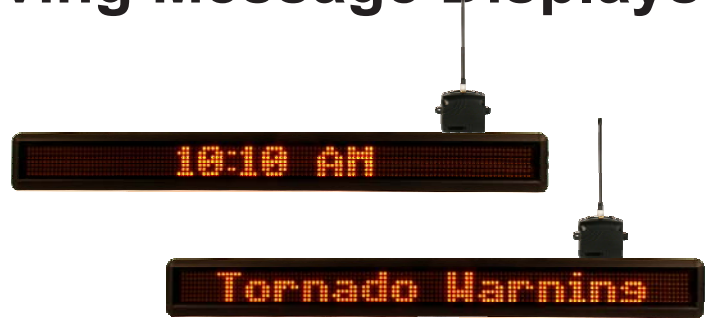


Moving message displays can be utilized as a digital clock or as a moving message display during emergencies.

The SL7x120TC wireless message board is an economical way to alert students and faculty in each classroom of emergencies. During an emergency, the sign changes into an alpha-numeric warning system that will display one of the pre-defined messages or the Text-to-Speech message that is typed into the BRG Wireless Control Program.

The sign acts as a synchronized clock when not being used. This keeps your entire campus on the same time. Cutting down on tardiness and people skipping out of class early.

An optional internal UPS is available for this unit giving you over 30 minutes of continuous use during a power outage.

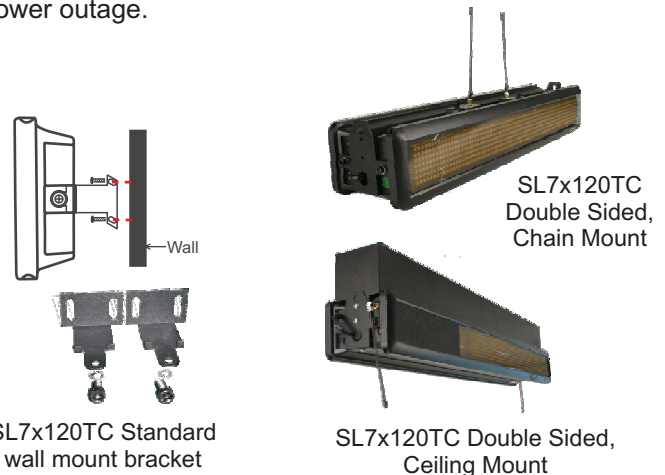

SL7x120TC Standard wall mount bracket

SL7x120TC Double Sided, Ceiling Mount

