



## 664 Style Time Zone Clock



Model 664A - 1.8" & 2.5" time, 0.75" & 1.0" zone labels, 5 zones

The 664 series time zone clocks have user changeable multi-color bar-segment LED time with white vinyl zone labels below the time of each zone. 664 models display 5 time zones. Some models include a 10 or 20 character dot matrix LED date.

Each 664 clock comes standard with an OCXO oscillator, which is accurate to .06 seconds per year.

For easy clock management, an infrared (IR) remote control is included with every 664 model. You can specify a radio (RF) remote, if preferred for no additional charge.

### Features:

- OCXO oscillator accurate to .06 seconds per year
- 1.8", 2.5" or 4.0" user changeable multi-color bar segment LEDs for displaying time\* (red, blue, green, yellow, magenta, cyan & white LED colors)
- 0.75", 1.0" or 1.5" white vinyl lettering for displaying zone names\*
- 10 or 20 character red dot matrix date display\*
- Models display 5 separate time zones
- 12 or 24 hour format
- DST and time zone offsets supported
- IR remote control standard or optional RF remote
- Black brushed Aluminum frame
- Multiple cord lengths available
- US, British, Australian or European plugs
- 100-240 VAC. 50-60 cycle power
- Available on GSA, contract GS-02F-0030U


\*See individual model number for details.



### Oven Controlled Crystal Oscillator (OCXO)

- Accurate to 2 PPB (parts per Billion) or .06 seconds per year or about 1 second in 20 years.
- 1 thousand times more accurate than most competing clocks
- Eliminates the need for GPS or Network time synchronization for

# 664 Style Time Zone Clocks

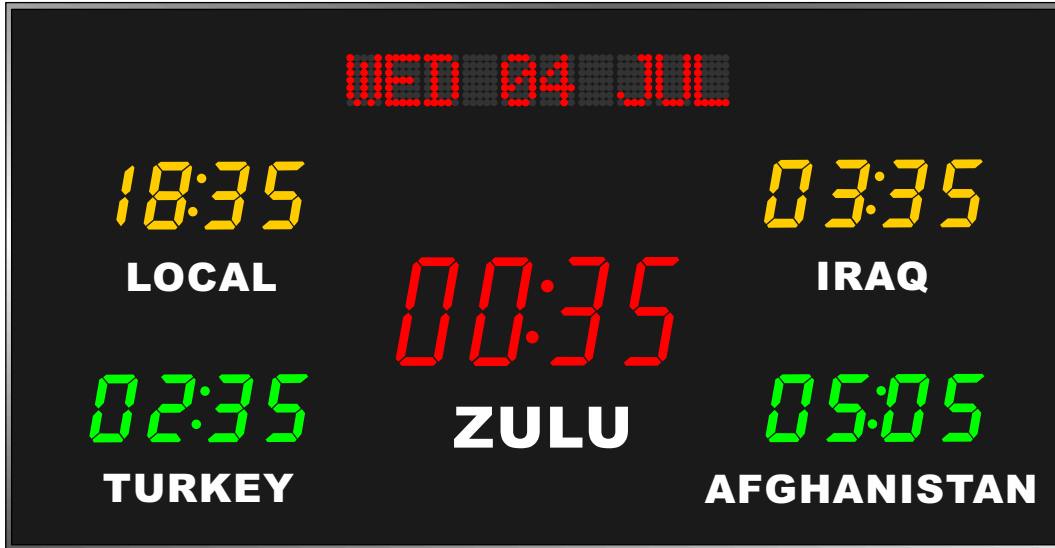

Model 664E - 2.5" & 4.0" time, 2.0" 10 character date, 1.0" & 1.5" zone labels, 5 zones

Model	Zones	Displays		White Vinyl Label	Viewing Distance	Dimensions		
		Perimeter	Center			H	W	D
664A	5	1.8"	2.5"	.75" / 1.0"	40-75 ft.	12.25	32.25	3.25
664B	5	2.5"	4.0"	1.0" / 1.5"	75-100 ft.	16.25	39.25	3.25
664C	5	4.0"	4.0"	1.5"	100 ft.	20.25	45.25	3.25

No dates on above models

664D	5	1.8"	2.5"	.75" / 1.0"	40-75 ft.	16.25	32.25	3.25
664E	5	2.5"	4.0"	1.0" / 1.5"	75-100 ft.	20.25	39.25	3.25
664F	5	4.0"	4.0"	1.5"	100 ft.	24.25	45.25	3.25

Ten character 2 inch dates on above models

664G	5	1.8"	2.5"	.75" / 1.0"	40-75 ft.	16.25	39.25	3.25
664H	5	2.5"	4.0"	1.0" / 1.5"	75-100 ft.	20.25	39.25	3.25
664I	5	4.0"	4.0"	1.5"	100 ft.	24.25	45.25	3.25

Twenty character 2 inch dates on above models

## Color Options



Red

Blue

Green

Yellow

Magenta

Cyan

White



Email: [sales@brgproducts.com](mailto:sales@brgproducts.com)  
 Web Site: <http://www.brgproducts.com>

Copyright 2019, BRG Precision Products, All rights reserved. Printed in the USA, 664 Spec Sheet Rev 1.5.05.06.2019



600 N River Street • Derby, Kansas 67037  
 800-295-0220 • 316-788-2000  
 Fax: 316-788-7080